



DESCRIPTION

A solid lamp designed with rigorous and functional lines. Rectus Wall Turning Arm is defined by a burnished brass, matte or polished black nickel tubular structure made up of a swiveling arm ending in an adjustable light source, which diffuses a warm and punctual light. Rectus is also available in floor and table versions.

PRODUCTS DETAILS

<b>FUNCTION</b>	WALL
<b>LOCATION</b>	INTERIOR
<b>LIGHT EMISSION</b>	DIRECTIONAL LIGHT
<b>LIGHT SOURCE</b>	1 × MAX 6W GU10 PAR 16 LED 560lm 2700°K - DIMMABLE (BULBS EXCLUDED)
<b>RATED VOLTAGE</b>	110 - 120 V / 220 - 240 V
<b>FREQUENCY</b>	50 - 60Hz

DALI or TRIAC dimming kit available upon request

CERTIFICATION




MATERIALS

STRUCTURE  
**M07 + M04** MATTE BLACK NICKEL + POLISHED BLACK NICKEL  
**M12** DARK BURNISHED BRASS

PACKAGE


QTY	DIMENSIONS	NET WEIGHT	GROSS WEIGHT	TOTAL VOL.
1 × BOX	70 × 60 × H 18 cm (27"6 × 23"6 × 7"1)	2,5 kg	5 kg	0,08 m <sup>3</sup>

DIMENSIONS

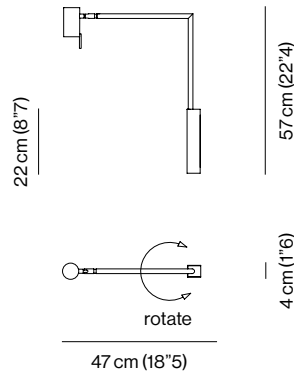



**DESCRIPTION** A solid lamp designed with rigorous and functional lines. Rectus Wall Turning Arm is defined by a burnished brass, matte or polished black nickel tubular structure made up of a swiveling arm ending in an adjustable light source, which diffuses a warm and punctual light. Rectus is also available in floor and table versions.

<b>PRODUCTS DETAILS</b>	<b>FUNCTION</b>	WALL
	<b>LOCATION</b>	INTERIOR
	<b>LIGHT EMISSION</b>	DIRECTIONAL LIGHT
	<b>LIGHT SOURCE</b>	1 x MAX 6W GU10 PAR 16 LED 560lm 2700°K - DIMMABLE (BULBS EXCLUDED)
	<b>RATED VOLTAGE</b>	110 - 120 V / 220 - 240 V
	<b>FREQUENCY</b>	50 - 60Hz
	<b>SUPPLY</b>	POWER CORD
	<b>SWITCHING</b>	ON/OFF SWITCH
	<b>CABLE LENGTH</b>	

DALI or TRIAC dimming kit available upon request

**CERTIFICATION**



**MATERIALS**

**STRUCTURE**  
**M07 + M04** MATTE BLACK NICKEL + POLISHED BLACK NICKEL  
**M12** DARK BURNISHED BRASS

**PACKAGE**

<b>QTY</b>	<b>DIMENSIONS</b>	<b>NET WEIGHT</b>	<b>GROSS WEIGHT</b>	<b>TOTAL VOL.</b>
1 x BOX	70 x 60 x H 18 cm (27"6 x 23"6 x 7"1)	2,5 kg	5 kg	0,08 m <sup>3</sup>

**DIMENSIONS**

