



DESCRIPTION Refined light burnished brass, polished or matte black nickel lances form intricate luminous intersections, delineating the surrounding space with light. Spear Chandelier's scenic presence expands in space, translating simple shapes into iconic LED light compositions. Also available in a ceiling version.

PRODUCTS DETAILS

FUNCTION	CEILING
LOCATION	INTERIOR
LIGHT EMISSION	INDIRECT DOWNWARD LIGHT
LIGHT SOURCE	SPEAR CHANDELIER STRIP LED 15W/m 2700°K 1900lm/m CRI 80+ 24Vdc TOT. = 26W 3325lm
	SPEAR CHANDELIER - S STRIP LED 15W/m 2700°K 1900lm/m CRI 80+ 24Vdc TOT. = 18W 2280lm
ENERGY EFFICIENCY	G
RATED VOLTAGE	110 - 120 V / 220 - 240 V
FREQUENCY	50 - 60Hz
SUPPLY	TERMINAL BLOCK
BALLAST	BALLAST INCLUDED

DALI or TRIAC dimming kit available upon request

CERTIFICATION



MATERIALS


STRUCTURE	
M04	POLISHED BLACK NICKEL
M07	MATTE BLACK NICKEL
M11	LIGHT BURNISHED BRASS

PACKAGE

QTY	DIMENSIONS	NET WEIGHT	GROSS WEIGHT	TOTAL VOL.
SPEAR CHANDELIER				
1× BOX	74 × 51 × H 33 cm (29"1 × 20"1 × H 13")	3 kg	5 kg	0,20 m³
1× BOX	85 × 42 × H 23 cm (33"5 × 16"5 × H 9"1)	7 kg	9 kg	
SPEAR CHANDELIER - S				
1× BOX	74 × 51 × H 33 cm (29"1 × 20"1 × H 13")	3 kg	5 kg	0,20 m³
1× BOX	85 × 42 × H 23 cm (33"5 × 16"5 × H 9"1)	5 kg	7 kg	

DIMENSIONS

SPEAR CHANDELIER

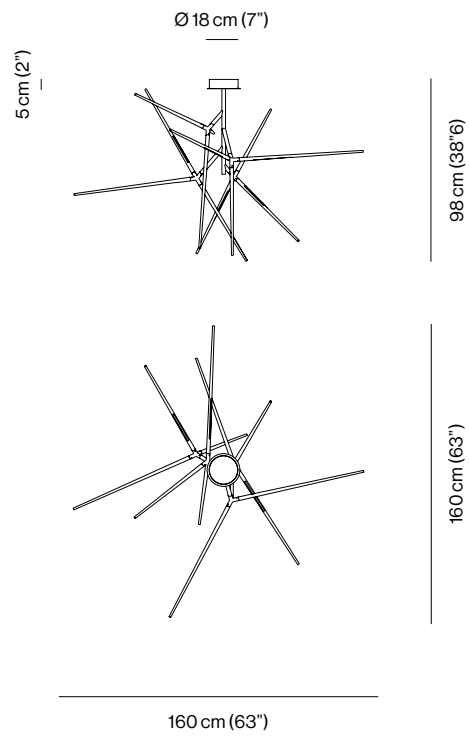

SPEAR CHANDELIER - S

